



viewpoint
Resources Ltd



**PRODUCT
CATALOGUE**

Lubrication and Allied Equipment

CONTENT

INTRODUCTION.....	01
AUTOMATIC LUBRICATION.....	02
GREASE SYSTEMS.....	04
BEARING PACKER.....	06
PNEUMATIC OIL SET.....	07
MANUEL OIL PUMPS.....	08
HEAVY DUTY EQUIPMENT.....	09
ELECTRIC OPERATED DOUBLE DIAPHRAGM PUMP.....	10



INTRODUCTION

WELCOME TO VIEWPOINT RESOURCES LTD


At Viewpoint Resources Ltd, we are committed to delivering reliable mining, automotive, and industrial solutions across Zambia and beyond.

As a trusted supplier, we specialize in procurement, lubrication systems, and allied equipment designed to improve efficiency, safety, and productivity in every operation.

Our strong partnerships with global manufacturers, combined with local expertise, ensure that our clients receive innovative, cost-effective, and durable solutions tailored to their needs.

This catalog showcases our range of products and services, reflecting our dedication to quality, safety, and customer satisfaction. Whether for mining, aviation, construction, or industrial applications, Viewpoint Resources Ltd is your partner for sustainable growth.


AUTOMATIC LUBRICATION

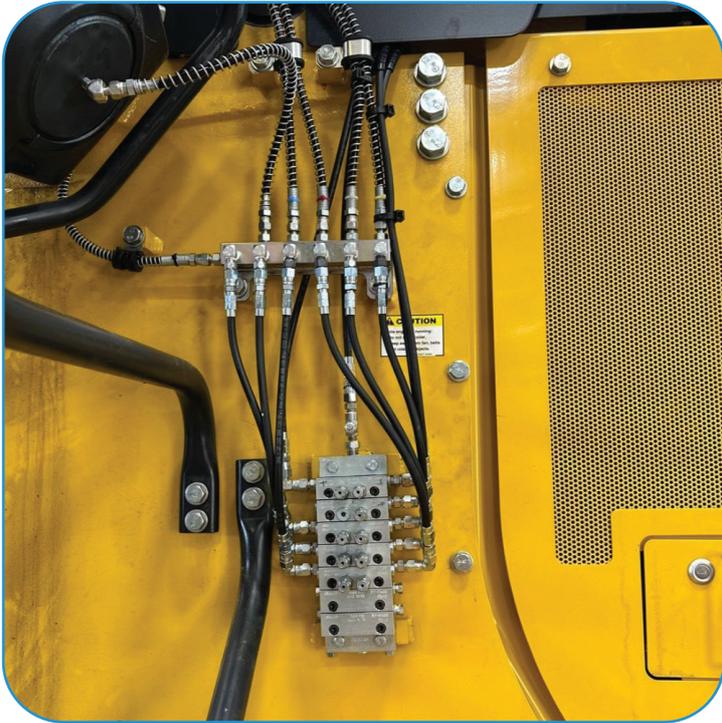

AUTO LUBE SYSTEMS

With automatic lubrication, systems provide the proper amount of lubrication on a more frequent basis. Plus, equipment is lubricated while moving, so productivity never wanes. The Graco range of Automatic Lube Systems is built & designed for all major Equipment Manufacturers.


AUTOMATIC LUBRICATION

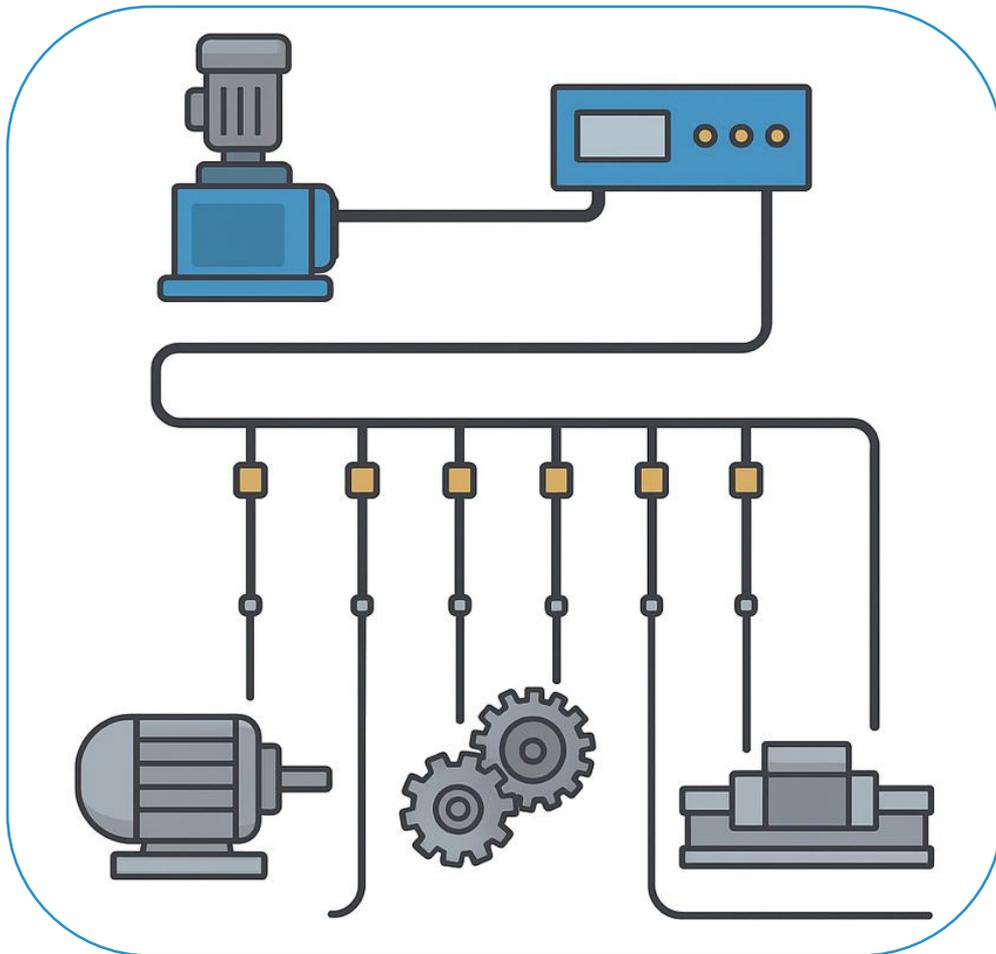

CENTRALISED LUBRICATION

A centralized lubrication system is a setup that automatically delivers the right amount of lubricant (oil or grease) to multiple machine parts from one central point. This saves time, reduces equipment wear, and keeps machines running smoothly without needing to stop them for manual greasing.

GREASE SYSTEMS

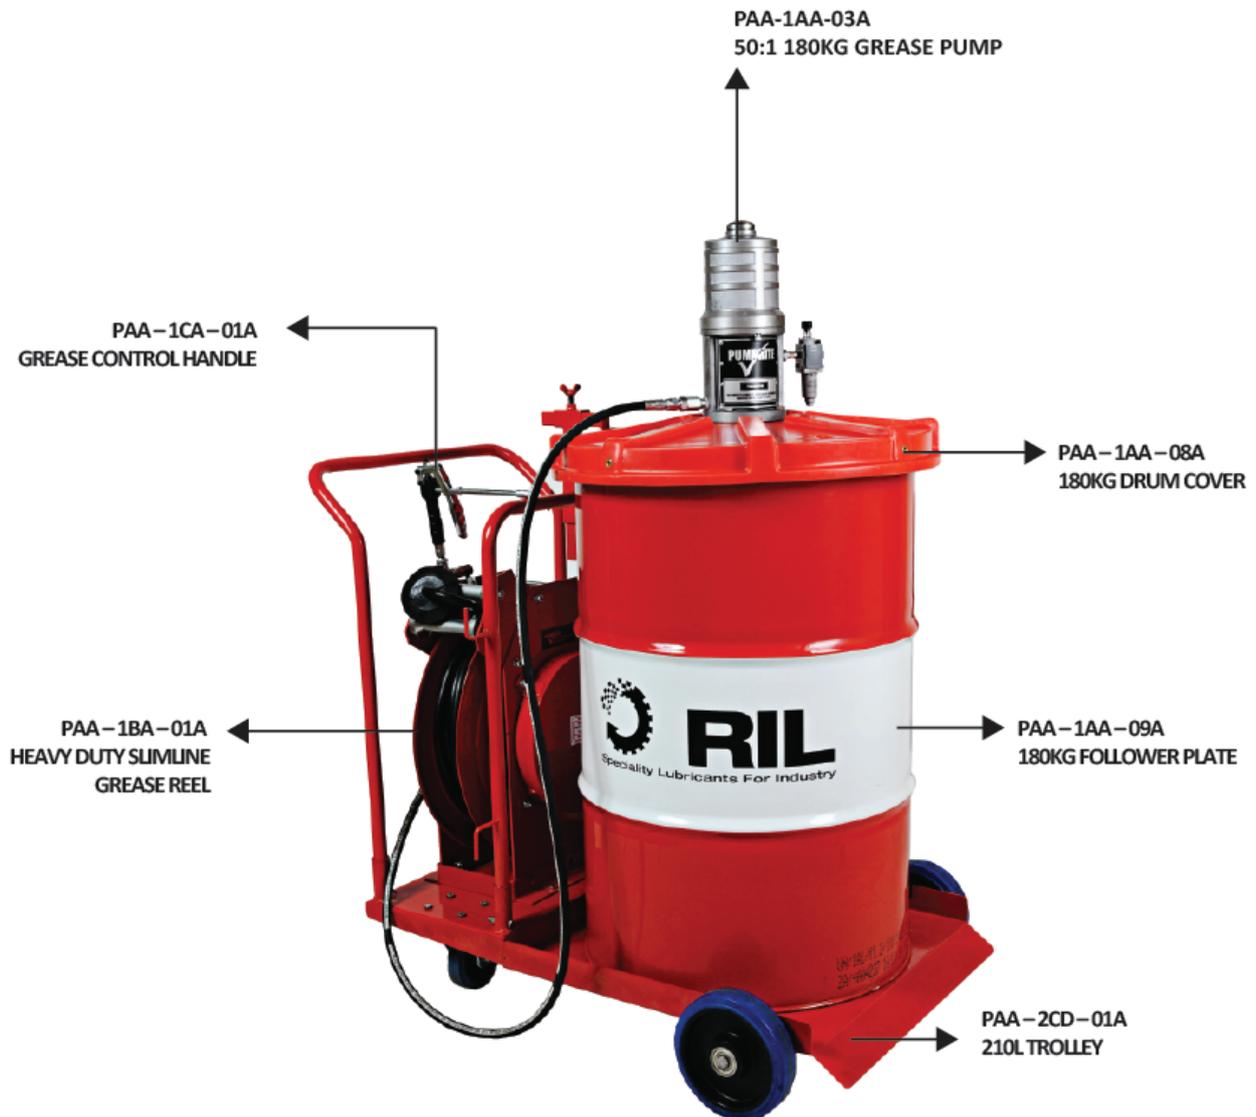

GREASE SYSTEMS



PAA-1BA-01A
SLIMLINE RETRACTABLE GREASE REEL



PAA-1BA-02A
STANDARD RETRACTABLE GREASE REEL



PAA-1BA-03A
WIDESPAN RETRACTABLE GREASE REEL

HEAVY DUTY RETRACTABLE HOSE REEL RANGE

- RETRACTION BY A HIGH QUALITY SPRING LOAD SYSTEM
 - HARDENED AND TEMPERED WOUND SPRING STEEL
 - ROBUST DESIGN
- HOSE EXTENSION AND RETRACTION ARE FACILITATED BY NON STICK ROLLERS
 - ALL COMPONENTS ARE PLATED OR POWDER COATED FOR HIGH CORROSION RESISTANCE
 - PARKER S-SERIES RANGE OF HIGH PRESSURE HYDRAULIC ROTARY COUPLING SUPPLIED AS STANDARD
- 1 YEAR WARRANTY - PLEASE NOTE GENERAL TERMS AND CONDITIONS

BEARING PACKER



This improved unit has multiple grease outlets on a flat base with an outlet selection chamber and adjusting shaft mechanism that concentrates the grease to the internal section of the bearing that require greasing, thus eliminating waste that originates from the former singular outlet located centrally and minimising the time it takes to grease the fitted

Optimizing the use of lubrication and minimizing waste is paramount in the lubricating process. This product optimizes the time it takes to lubricate the bearings, minimizes the grease required through concentrated greasing and eliminates waste.

PRODUCT FEATURES


- EVEN LUBRICATION OF BEARING
- BEARING SIZE RANGE: 15MM ID(MAX 200MM OD)
- GREASE WASTE ELIMINATION WITH BEARING SIZE SELECTION AND ENABLED FILLING VISIBILITY
- GREASE CONTAMINATION ELIMINATION
- MULTIPLE BEARINGS IN SINGLE GREASING APPLICATION
- CONCENTRATED GREASING
- MINIMISED TIME REQUIRED TO GREASE BEARING(S)
- STANDARD 1/8" GREASE NIPPLE
- OPERATES IN CONJUNCTION WITH THE PUMPRITE MANUAL RANGE OF GREASE PUMPS
- ROBUST CONSTRUCTION
- QUICK AND EASY LUBRICATION OF WIDE RANGE OF BEARINGS
- FLUIDS HANDLED: GREASE UP TO NLGI-3
- SIMPLE CLAMP SYSTEM
- 1 YEAR WARRANTY - PLEASE NOTE GENERAL TERMS AND CONDITIONS

PNEUMATIC OIL SETS

FRL AVAILABLE
ON REQUEST



PAA-2CA-11A
RIGID OIL
CONTROL HANDLE

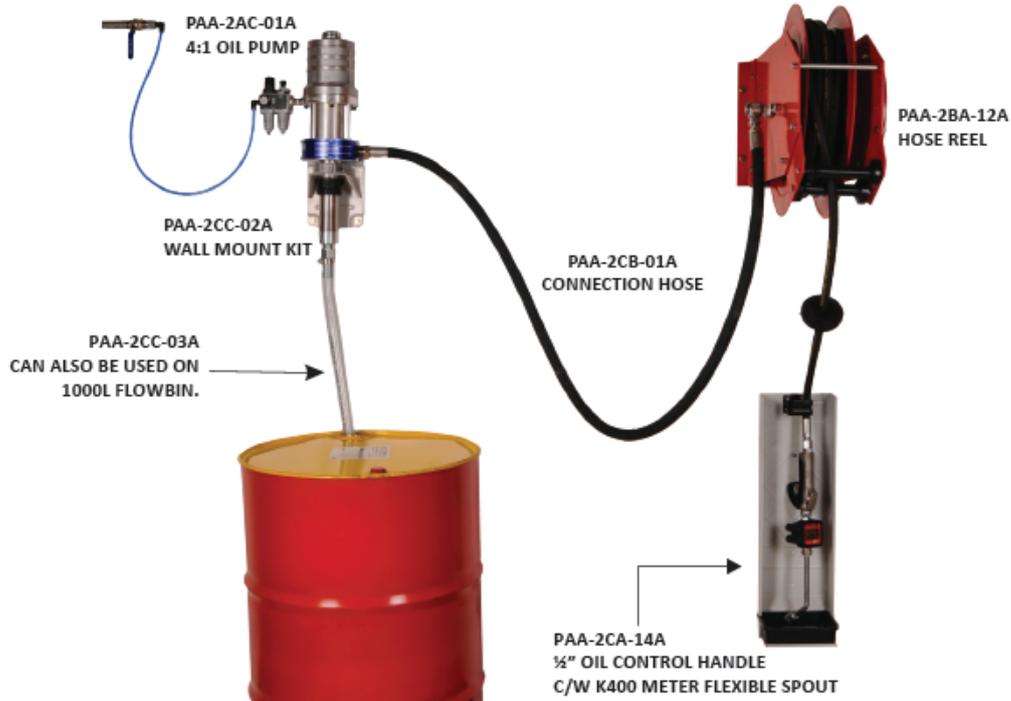

HEAVY DUTY EQUIPMENT



HEAVY DUTY RETRACTABLE HOSE REEL RANGE

FULLY EQUIPPED DIESEL TRAILERS & SKIDS
500L, 1000L & 2000L

VEHICLE MOUNTED MOBILE GREASE & OIL SYSTEMS
Fitted with a compressor, pneumatic pumps & hose
reels to be fully operational while out in the field.

MANUEL OIL PUMPS

PUMPRITE GEAR OIL BUCKET PUMP



PRODUCT FEATURES

- Semi-rotary Pumping Mechanism
- Adjustable Mechanical Mechanism Enables A Quantified Delivery Of Product
- Robust, User Friendly Design
- Internal Rack System Manufactured In Brass For Longevity In Operation
- All Components Are Plated Or Powder Coated For High Corrosion Resistance
- 250ml/stroke
- 1.5m Clear Reinforced Braided Hose Supplied As Standard
- 1 Year Warranty - Please Note General Terms And Conditions
- Available In A Variety Of Colours - By Customer Request

ELECTRIC OPERATED PUMPS

Meeting demands for clean energy and sustainable technologies while delivering massive cost savings for customers.



QUANTM I30 DOUBLE DIAPHRAGM PUMP

1" (25.4mm) Port
Flow rate: 114L/min (30gpm)
Fits 120V or 380V/480V outlets



QUANTM I80 DOUBLE DIAPHRAGM PUMP

EODD
1 1/2" (38.1 mm) Port
Flow rate: 300L/min (80gpm)



QUANTM I120 DOUBLE DIAPHRAGM PUMP

EODD
2" (50.8 mm) Port
Flow rate: 450 L/min (120gpm)
Fits 120V or 380V/480V outlets
Materials: Abrasives, solids, aggressive chemicals, and shear-sensitive materials

MILLING & CNC MACHINING



**EXPERTS IN PRECISION MILLING &
CNC MACHINING OF COMPONENTS
AND VARIOUS PARTS IN
VARIOUS INDUSTRIES**

HOSE REELS



GREASE Size: 3/8"

SIP01A HEAVY DUTY SLIMLINE RETRACTABLE GREASE REEL

SIP02A HEAVY DUTY STANDARD RETRACTABLE GREASE REEL

SIP03A HEAVY DUTY WIDESPAN RETRACTABLE GREASE REEL

HOSE: Up to 30m Hose

OIL Size: 1/2" & 3/4"

SIP01B HEAVY DUTY SLIMLINE RETRACTABLE OIL REEL

SIP02B HEAVY DUTY STANDARD RETRACTABLE OIL REEL

SIP03B HEAVY DUTY WIDESPAN RETRACTABLE OIL REEL

HOSE: Up to 30m Hose

DIESEL Size: 1"

SIP01C 1" HEAVY DUTY STANDARD RETRACTABLE DIESEL REEL

HOSE: Up to 20m Hose

FOOT OPERATED GREASE PUMP



TECHNICAL SPECIFICATIONS

- **Max Delivery Pressure** 690 Bar (10,000 psi)
- **Delivery Rate** 2.7 ml (0.09 oz) per stroke
- **Grease Compatibility** NLGI consistency numbers 0, 1 and 2
- **Canister Capacity** 8 kg
- **Delivery Hose** 2 m (6.5 ft) x 6.35 mm (1/4") 2 wire braided hose
- **Hose Thread** 1/8" NPT (male)
- **Dimensions** L 470 mm x W 260 mm x H 420 mm (L 18 1/2" x W 10 1/4" x H 16 1/2")
- **Weight** Dry weight 10 Kg (352 oz)
- **Pump Activation** Foot operated
- **Pump Mechanism** 2 stage self-priming with pressure return valve
- **Grease Coupler** Heavy-duty, high pressure. Max working pressure 10,000 psi (690 Bar). Trigger activated lock-on patented coupler
- **Patents** US9097385 (others on application)



PHYSICAL ADDRESS

The registered offices of the company are situated;
Plot 180, Luanshya Road, Villa Elizabeth, Lusaka
We have presence in Copperbelt province and North
western province.

CONTACTS

Kennedy Nondo

Cell: +26 097 545 4883

Email: kennedy@viewpoint.co.zm

Patrick Mulama

Cell: +26 096 651 5575

Email: info@viewpoint.co.zm

For more info visit: www.viewpoint.co.zm